


651CW



ALUMINUM
铝合金

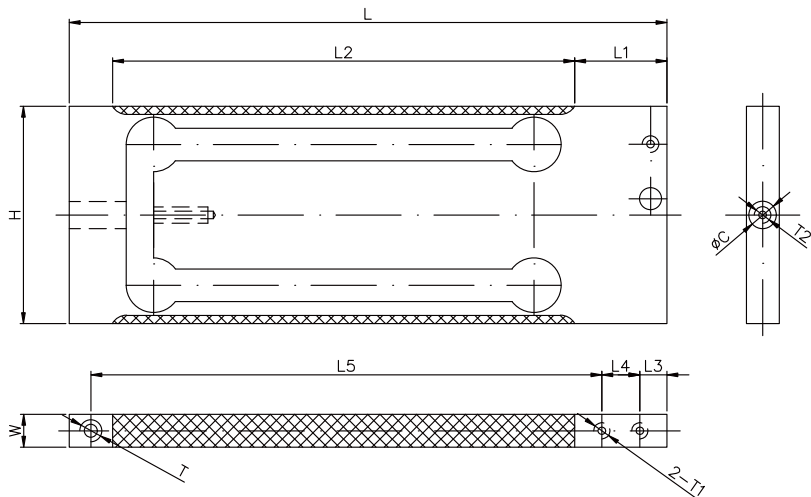

尺寸 DIMENSIONS

Rate Capacity

量程	C	L	L1	L2	L3	L4	L5	W	H	T	T1	T2
kg/mm												
0.1...0.5	5	110	17	85	5	7	94	6	33	M4深10	M3深10	M3深10
lb/inches(conversion of above dimensions 由以上尺寸转换)												
0.22...1.10	0.2	4.33	0.67	3.35	0.2	0.28	3.7	0.24	1.3	M4DP0.39	M3DP0.39	M3DP0.39

技术参数 SPECIFICATIONS

Full Scale Output 灵敏度输出	1.0 ± 20% mV/V	Recommended Excitation 使用电压	10V(15V Maximnm)
Zero Balance 零点输出	± 0.04 mV/V	Reference Max.Platform Size 最大秤台尺寸	120*120mm
Nonlinearity 非线性	< ± 0.017%	Insulation Resistance 绝缘阻抗	> 2[50V DC]GΩ
Repeatability 重复性	< ± 0.017%	Nominal Temperature Range 工作温度	-10℃ to 40℃ / 14°F to 104°F
Hysteresis Error 滞后	< ± 0.017%	Safe Overload 安全过载	150% of full scale
Creep in 30 min 30分钟蠕变	< ± 0.012% < ± 0.02%	Breaking Overload 极限过载	200% of full scale
Input Resistance 输入电阻	405 Ω ± 10	IP Rating 防护等级	IP66
Outnput Resistance 输出电阻	350 Ω ± 3	Cable Color Code 颜色码	Exc(输入)+:Red(红);Exc(输入)-:Black(黑);Sig(输出)+:Green(绿);Sig(输出)-:Whit白 Shield Bare(屏蔽)
Element Materia 材质	Aluminum 铝合金		

651CW

Special Features 特征

- ◆ 常温下，分度值可高达60,000
- ◆ 角差修正
- ◆ 单点式台面
- ◆ IP66防护
- ◆ Up To 60,000 Divisions Shor Term Precision At Romm Temperature
- ◆ Off-center load compensated
- ◆ Single point platform
- ◆ IP66 protection